




PRODUCT LINE

SILCAGRATE™ RECYCLED ENGINEERED POLYMER

16" X 18" X 1½" (2 s.f. per grate)

Each grate weighs 4 lbs and is fastened with #9 deck screws 3" long. It can be installed either side down depending on your application or need for additional gluing surface.

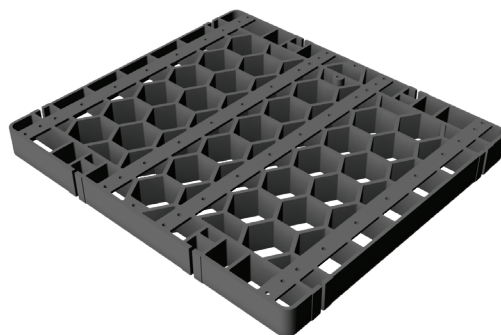

SILCA SOIL GRID MADE FROM RECYCLED MATERIAL


SOLD BY THE PALLET

13" x 13" - Wall Height 1" Wall Thickness 1/16" Weight 1½ lbs. Used for ground application paver installation. In most cases will reduce the need for backfill and aggregate by 50%.



G-TAPE JOIST TAPE – NO BACKING 4"X65'

Protects joist beams, rim joist stringers, posts, and stair systems from rot. Protects joist hangers from corrosion due to chemical reactions. It is also recommended to seam the SilcaMat™ together.

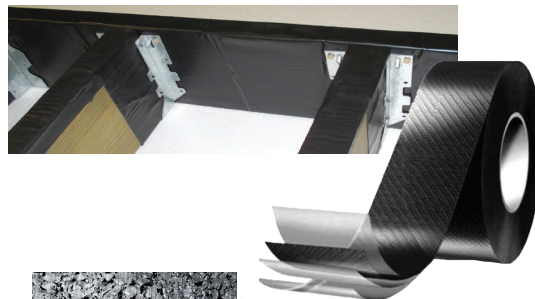


SILCAMAT™ RECYCLED RUBBER MATERIALS

MEETS ASTM STANDARDS FOR PERMEABILITY

- SMM-SilcaMat™ 2mm 1/8"


Sold per roll 4' x 50' (200 s.f.) Recommended underlay-ment for porcelain paver installation. Permeable

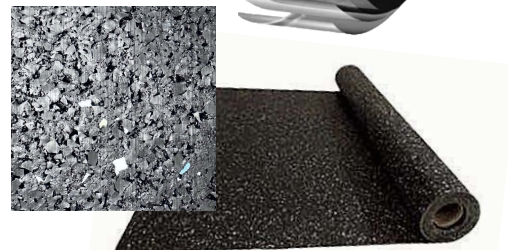

SILCA GEOTEXTILE FABRIC

4'x100' (400 sq. ft.), 4oz. NON-WOVEN.

For installation of concrete pavers and natural stone on deck and elevated surfaces. Permeable

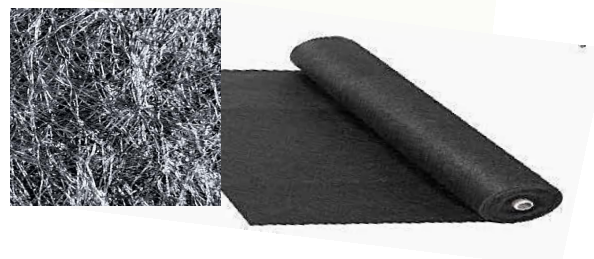



PRODUCT LINE


SILCASPACERS™ - SOLD BY 100 CT.

3" x 3" base - 1/16" tab - 1/4" tall and 3/16" wide
Flexible Black

Used for ground application of porcelain pavers.


Rigid Black

Used for porcelain paver applications on decks and elevated surfaces. Spacers are not necessary if using SilcaMat™.

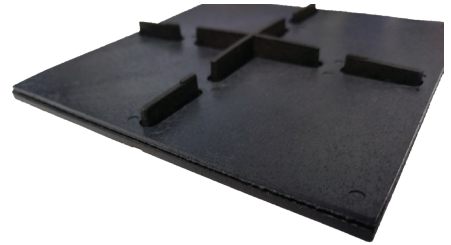

RISE-IT SPACERS, SOLD BY 100 CT.

6" X 6", 1/8" BASE WITH 1/8" TAB THAT IS 3/8" TALL
For use with porcelain pavers installed with open joints.

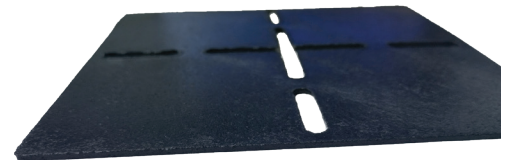

RISE-IT SHIMS, SOLD by 100 ct.

1/16" THICK, ADD UP TO 3 PER SPACER



U2 FASTENERS UNIVERSAL SCREWS

Self tapping screws, Structural & ACQ treated lumber compliant in IAPMO report ER-454.

Available in three package sizes: 100 ct, 330 ct., and 1,500 ct.

U2 FASTENERS CONSTRUCTION SCREWS

Self-tapping screws to attach cleats to joists for recessed SilcaGrate® applications

Available in two package sizes: 40 ct. and 144 ct.



SUREBOND 190 ADHESIVE

All purpose adhesive with 2,000 lb.psi adhesion, 500% elongation, Adheres to wood, plastic, and stone and stretches without breaking.

